

ROMER ABSOLUTE ARM

Portable Measuring Arms



ROMER ABSOLUTE ARM – ABSOLUTELY VALUABLE

Quality control, inspection, on-machine verification, reverse engineering, virtual assembly or 3D modelling. Wherever these needs arise, you will find the ROMER Absolute Arm. Much more than just a metrology tool, its value lies in its versatility. Portability, stability, light weight and high-performance laser scanners make the ROMER Absolute Arm an all-purpose 3D measurement, analysis and digitising tool that can be used by anyone, anywhere and with minimum training.

Unlike many metrology devices, the ROMER Absolute Arm does not require warm-up time or initialisation, thanks to a stable carbon fibre structure and industry-leading absolute encoders. Simply take the measuring arm to the part, switch it on and start measuring.

INCREASING PRODUCTIVITY ACROSS ALL INDUSTRIES

Typical Industries:

- Automotive
- Aerospace
- Power generation / Wind energy
- Forming industry
- Casting and forging
- Fabricated metal products
- Machinery manufacturing
- Sports equipment
- Piping and tubing
- Agriculture and heavy equipment
- Ship and boat building
- Railway
- Archaeological and historic preservation

Typical Measuring Applications:

- Sheet metal parts
- Dies and moulds / Tooling
- Machined parts
- Jigs / Fixture setup and alignment
- Tubes and tube assembly
- CAD-to-part comparison
- Alignment
- Reverse engineering
- Virtual assembly
- Body in white
- On-machine verification (OMV)
- Composites inspection
- Die-casting and patterns
- Maintenance, repair and overhaul (MRO)



HEX
METRO



ROMER ABSOLUTE ARM TOP FEATURES

RDS

The ROMER proprietary software RDS features SMART technology, allowing total management of checks in the field as well as temperature and shock monitoring.

Laser Scanning

The ROMER Absolute Arm is available with a completely integrated high-performance laser scanner or the external HP-L-20.8 scanner, for complex scanning tasks.

ROMER Absolute Arms are the only scanning systems on the market to offer fully-verifiable scanning system accuracy.

Automatic and Repeatable Probe Recognition

Intelligent Quick Change Probes: Swap touch probes at any time without the need to recalibrate. The ROMER Absolute Arm's repeatable mount allows you to change probes on the fly, according to your measurement needs.

Instant Feedback

The ROMER Absolute Arm provides immediate acoustic and haptic feedback to the operator, allowing the system to be used in even the harshest industrial environments.



Absolute Encoders

Referencing and warm-up time is a thing of the past – just switch the arm on and measure.

Measurement Volume

Size does matter: The ROMER Absolute Arm is available in seven lengths between 1.2 m and 4.5 m.

Certification

All ROMER Absolute Arms including scanning systems pass through B89.4.22 certification. Additional certifications according to VDI/VDE 2617-9 are also available. The ROMER Absolute Arm Compact model is available with a choice of ISO 10360-2 or B89.4.22 certification.

Zero G

The Zero G counterbalance minimises torque in the base of the arm. This allows greater freedom in mounting options such as lightweight tripods, magnetic and vacuum bases making the ROMER Absolute Arm the most portable available.

SmartLock


If the ROMER Absolute Arm is not in use it can be locked safely into its rest position. SmartLock also allows the arm to be fixed in any intermediate position.

Feature Packs

Thanks to easily interchangeable Feature Packs, the functionality of the ROMER Absolute Arm can always be enhanced. Feature packs are available for wi-fi communication, wi-fi scanning capability and full battery operation.



ROMER ABSOLUTE ARM WHAT USERS SAY

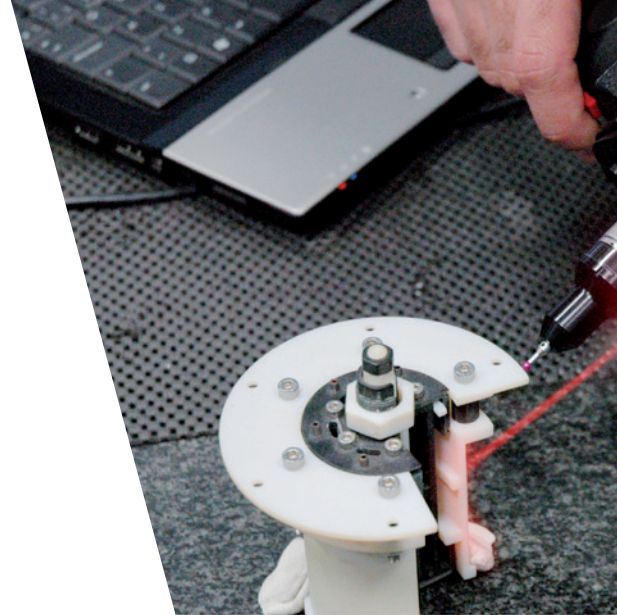

“HEXAGON METROLOGY IS OUR VALUABLE AND RELIABLE PARTNER, WHILE THE **ROMER ABSOLUTE ARM** GUARANTEES THE QUALITY OF OUR PRODUCTS.”

**Marcin Wojciechowski, Solaris,
Sroda Wielkopolska, Poland**

“By greatly shortening the feedback loop between the production measurement activity and the design process, we’re both **saving time** and improving results.”

**Steve Ruggiero, Pratt & Whitney,
CT, USA**

“The arms are very good, we are finding errors on components now that we didn’t know we had before, the **handling of the arm is excellent** compared to previous arms and the easy changing of probes makes the arms very user friendly.”

**Sam Harper, Red Bull Technology,
Milton Keynes, UK**

“THE **VERSATILITY OF THE ARM** MADE IT PERFECT FOR OUR NEEDS: WE COULD IMMEDIATELY SEE WHERE IT WOULD SAVE US TIME IN SLED SET UP, BUT WE’RE NOW FINDING APPLICATIONS FOR IT THAT WE HADN’T EVEN IMAGINED BEFORE.”

**Kristan Bromley, World Skeleton Champion and
President of Bromley Technologies,
Rotherham, UK**

“Hexagon Metrology helps us to optimise every area of the car and engine, which drives results on the track. The race engineers are confident that measurements made with the **ROMER Absolute Arm are more accurate** than those gathered with previous inspection techniques.”

**Doug Duchardt, Hendrick Motorsports,
NC, USA**

“WHEN YOU ARE STANDING IN THE MIDDLE OF THE FIXTURE, THE **ABSOLUTE ENCODERS** ON THE ROMER ABSOLUTE ARM ARE SUPERB, BECAUSE YOU DON’T HAVE TO REFERENCE THEM.”

**Peter Haase, Bombardier,
Bautzen, Germany**

“The **time saved** is the key factor. What used to take days now takes hours. The percentage of scrap tubing has almost been eliminated entirely.”

**Tony Wells, Fabspeed,
PA, USA**

“THE ROMER ABSOLUTE ARM GUARANTEES THE **ACCURACY** WE NEED TO CHECK BIKE GEOMETRIES AT RACES. NO OTHER MEASUREMENT SYSTEM WOULD ENABLE US TO CHECK A COMPLETE FRAME TO 100 MICRON TOLERANCES IN LESS THAN 10 MINUTES.”

**Johan Kucaba, Union Cycliste Internationale
(UCI),
Aigle, Switzerland**



ACCURACY MADE EASY

Thousands of users across all industry sectors rely on portable measuring arms from Hexagon Metrology. These users appreciate how the ROMER Absolute Arm is designed to facilitate their daily measurement routines.



Carbon fibre makes the arm rock-solid under any environmental condition such as temperature changes.

SpinGrip facilitates handling the arm on larger parts.

Instant feedback through acoustic guidance and haptic interface allows the user to be sure of his measurements in any environment.

User aids, such as a wrist with incorporated mouse function, a work light and an integrated digital camera are designed to make industrial measurement easier, anywhere.

The Zero G counterbalance lets the arm float in the user's hand, turning a painful ergonomic experience into a pleasant and productive one.

AS INDIVIDUAL AS YOUR APPLICATION

Feature Packs

ROMER Feature Packs unfold the full potential of a portable measuring arm. These interchangeable extensions can be mounted onto the rear of the arm, providing you with new functionality:

The ROMER Mobility Pack includes battery and wi-fi communication – maximum flexibility for the ROMER Absolute Arm.

The ROMER Scanning Pack is the interface for laser scanners.

The ROMER Wireless Scanning Pack for the integrated laser scanner makes high-speed 3D scanning completely wireless.



Accessories

Different probes, tripods and stands for different applications: All ROMER Absolute Arms are ready for a multitude of environments. Hundreds of accessories are available à la carte.

ROMER ABSOLUTE ARM

THE ALL-PURPOSE METROLOGY TOOL



ROMER ABSOLUTE ARM

The 6-axis ROMER Absolute Arm is designed for highly-accurate tactile measurements on countless types of workpiece. It allows for reliable touch-probe measurement and inspection of almost anything including sheet metal parts, plastic components or carbon fibre structures. If your measurement jobs require laser scanning later, an upgrade is possible at any time.



ROMER ABSOLUTE ARM WITH INTEGRATED LASER SCANNER

Freedom of movement: with a fully integrated and certified RS3 laser scanner, this is an all-purpose metrology system for almost any measurement need. Point cloud inspection, product benchmarking, reverse engineering, rapid prototyping, virtual assembly or CNC milling are just some of the typical laser scanning applications that can be added to the rich portfolio of touch-probe measurement applications. The integrated laser scanner is designed to capture data from almost any object surface. It does not need warm-up time or additional cables and controllers. Scanner and probe measurements are combined in the same software session.



ROMER ABSOLUTE ARM WITH EXTERNAL LASER SCANNER

The ROMER Absolute Arm with external scanner is the high-end laser scanning platform designed for the HP-L-20.8 laser scanner from Hexagon Metrology. With HP-L-20.8, the ROMER Absolute Arm offers first-class performance on the most complex surface types. Automatic laser control means that multiple surface colours can be scanned in a single pass. Thanks to the HP-L-20.8's unique flying dot technology, the scan width and point density are entirely variable, allowing the user to guarantee maximum scan detail where it's needed most.



ROMER TUBE INSPECTION SOLUTION

The ROMER Tube Inspection Solution covers all 3 main tasks of tube measurement in a single non-contact product: tube inspection and definition, geometry measurement and even interfacing to CNC tube bending machines is possible, via bending program correction. The ROMER Tube Inspection Solution is the only portable true tube inspection solution on the market. It can be taken to the workpiece to measure pipes, lines, hoses and tubes in situ, thereby saving time and effort. Reverse engineering of tubes and hoses is also unbelievably fast, and without any need for complex laser scanning.

ROMER ABSOLUTE ARM SPECIFICATION CHARTS

ROMER ABSOLUTE ARM COMPACT PROBING SPECIFICATIONS


Model	Measuring range	B89.4.22		ISO 10360-2		Arm weight
		Point repeatability	Volumetric accuracy	MPEp	MPEe	
7312	1.2 m / 3.9 ft.	0.014 mm / 0.0006 in.	± 0.025 mm / 0.0010 in.	8 µm	5+L/40≤18 µm	10.2 kg / 22.5 lbs
7512	1.2 m / 3.9 ft.	0.010 mm / 0.0004 in.	± 0.020 mm / 0.0008 in.	6 µm	5+L/65≤15 µm	10.8 kg / 23.8 lbs

Point repeatability and volumetric accuracy values according to B89.4.22. MPEp is the Maximum Permissible Probing Error according to the ISO 10-360-2 standard. MPEe is the Volumetric Length Measuring Error according to the ISO 10-360-2 standard. Generally, the MPEe value is the most appropriate for determining the arm accuracy.

Selecting a certification: is B89 or ISO better?

The ROMER Absolute Arm Compact is offered with a choice of two certifications: B89.4.22 or ISO 10360-2. Each certification quotes the arm accuracy in a different way. B89 is the standard certification typically used for PCMMs and quotes the accuracies (volumetric accuracy and point repeatability) as single absolute values. ISO certification is a stationary CMM type certification that quotes the arm accuracy according to a variable 'L', where 'L' is equal to the length of measurement that is being performed. The longer the measurement, the higher the L value and therefore the lower the measurement accuracy. We offer this second possibility because it allows the arm to be more easily incorporated into inspection applications that centre around stationary CMMs by enabling you to understand the exact accuracy of the ROMER Absolute Arm Compact at any given time.

ROMER ABSOLUTE ARM COMPACT VOLUMETRIC ACCURACY TO ISO 10-360-2 (MPE_e)

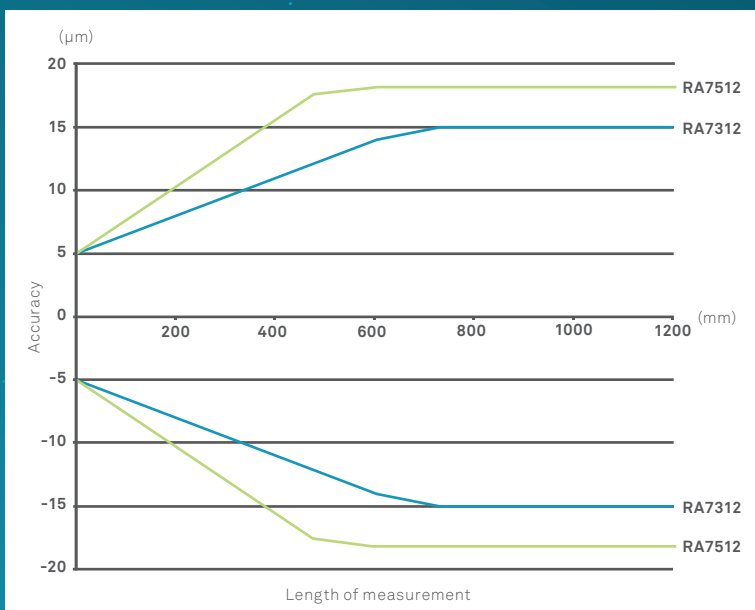

6-AXIS PROBING SPECIFICATIONS

	Model	Measuring range	Point repeatability ¹	Volumetric accuracy ²	Arm weights
73 series	7320	2.0 m / 6.6 ft.	0.030 mm / 0.0012 in.	± 0.042 mm / 0.0017 in.	7.4 kg / 16.3 lbs
	7325	2.5 m / 8.2 ft.	0.038 mm / 0.0015 in.	± 0.051 mm / 0.0020 in.	7.7 kg / 17.0 lbs
	7330	3.0 m / 9.8 ft.	0.059 mm / 0.0023 in.	± 0.075 mm / 0.0030 in.	8.0 kg / 17.6 lbs
	7335	3.5 m / 11.5 ft.	0.079 mm / 0.0031 in.	± 0.100 mm / 0.0039 in.	8.3 kg / 18.3 lbs
	7340	4.0 m / 13.1 ft.	0.099 mm / 0.0039 in.	± 0.125 mm / 0.0049 in.	8.6 kg / 19.0 lbs
	7345	4.5 m / 14.8 ft.	0.120 mm / 0.0047 in.	± 0.150 mm / 0.0059 in.	8.9 kg / 19.6 lbs
75 series	7520	2.0 m / 6.6 ft.	0.016 mm / 0.0006 in.	± 0.023 mm / 0.0009 in.	7.7 kg / 17.0 lbs
	7525	2.5 m / 8.2 ft.	0.020 mm / 0.0008 in.	± 0.029 mm / 0.0011 in.	8.0 kg / 17.6 lbs
	7530	3.0 m / 9.8 ft.	0.030 mm / 0.0012 in.	± 0.044 mm / 0.0017 in.	8.3 kg / 18.3 lbs
	7535	3.5 m / 11.5 ft.	0.040 mm / 0.0016 in.	± 0.057 mm / 0.0022 in.	8.6 kg / 19.0 lbs
	7540	4.0 m / 13.1 ft.	0.055 mm / 0.0022 in.	± 0.069 mm / 0.0027 in.	8.9 kg / 19.6 lbs
	7545	4.5 m / 14.8 ft.	0.070 mm / 0.0028 in.	± 0.082 mm / 0.0032 in.	9.2 kg / 20.3 lbs

All specifications according to B89.4.22. Certification is also available to VDI/VDE 2617-9.

7-AXIS PROBING AND SCANNING SPECIFICATIONS

	Model ³	Measuring range	Probing point repeatability ¹	Probing volumetric accuracy ²	Scanning system accuracy SI ⁴ (with RS3)	Scanning system accuracy SE ⁴ (with HP-L-20.8)	Arm weights SI	Arm weights SE
73 series	7320SI/SE	2.0 m / 6.6 ft.	0.044 mm / 0.0017 in.	± 0.061 mm / 0.0024 in.	0.079 mm / 0.0031 in.	0.075 mm / 0.0030 in.	8.3 kg / 18.3 lbs	7.9 kg / 17.4 lbs
	7325SI/SE	2.5 m / 8.2 ft.	0.049 mm / 0.0019 in.	± 0.069 mm / 0.0027 in.	0.084 mm / 0.0033 in.	0.080 mm / 0.0031 in.	8.6 kg / 19.0 lbs	8.2 kg / 18.1 lbs
	7330SI/SE	3.0 m / 9.8 ft.	0.079 mm / 0.0031 in.	± 0.100 mm / 0.0039 in.	0.119 mm / 0.0047 in.	0.113 mm / 0.0044 in.	8.9 kg / 19.6 lbs	8.5 kg / 18.7 lbs
	7335SI/SE	3.5 m / 11.5 ft.	0.099 mm / 0.0039 in.	± 0.125 mm / 0.0049 in.	0.147 mm / 0.0058 in.	0.140 mm / 0.0055 in.	9.2 kg / 20.3 lbs	8.8 kg / 19.4 lbs
	7340SI/SE	4.0 m / 13.1 ft.	0.115 mm / 0.0045 in.	± 0.151 mm / 0.0059 in.	0.181 mm / 0.0071 in.	0.172 mm / 0.0068 in.	9.5 kg / 20.9 lbs	9.1 kg / 20.1 lbs
	7345SI/SE	4.5 m / 14.8 ft.	0.141 mm / 0.0056 in.	± 0.179 mm / 0.0070 in.	0.214 mm / 0.0084 in.	0.203 mm / 0.0080 in.	9.8 kg / 21.6 lbs	9.4 kg / 20.7 lbs
75 series	7520SI/SE	2.0 m / 6.6 ft.	0.023 mm / 0.0009 in.	± 0.033 mm / 0.0013 in.	0.058 mm / 0.0023 in.	0.053 mm / 0.0021 in.	8.6 kg / 19.0 lbs	8.2 kg / 18.1 lbs
	7525SI/SE	2.5 m / 8.2 ft.	0.027 mm / 0.0011 in.	± 0.038 mm / 0.0015 in.	0.063 mm / 0.0025 in.	0.058 mm / 0.0023 in.	8.9 kg / 19.6 lbs	8.5 kg / 18.7 lbs
	7530SI/SE	3.0 m / 9.8 ft.	0.042 mm / 0.0017 in.	± 0.058 mm / 0.0023 in.	0.083 mm / 0.0033 in.	0.078 mm / 0.0031 in.	9.2 kg / 20.3 lbs	8.8 kg / 19.4 lbs
	7535SI/SE	3.5 m / 11.5 ft.	0.055 mm / 0.0022 in.	± 0.081 mm / 0.0032 in.	0.101 mm / 0.0040 in.	0.096 mm / 0.0038 in.	9.5 kg / 20.9 lbs	9.1 kg / 20.1 lbs
	7540SI/SE	4.0 m / 13.1 ft.	0.067 mm / 0.0026 in.	± 0.098 mm / 0.0039 in.	0.119 mm / 0.0047 in.	0.114 mm / 0.0045 in.	9.8 kg / 21.6 lbs	9.4 kg / 20.7 lbs
	7545SI/SE	4.5 m / 14.8 ft.	0.084 mm / 0.0033 in.	± 0.119 mm / 0.0047 in.	0.138 mm / 0.0054 in.	0.133 mm / 0.0052 in.	10.1 kg / 22.3 lbs	9.7 kg / 21.4 lbs

All specifications in relation to B89.4.22.

ROMER ABSOLUTE ARM LASER SCANNERS

	Integrated scanner RS3		External scanner HP-L-20.8		
Scanning sensor specification	Max. point acquisition rate	460 000 Points/s	150 000 Points/s		
	Points per Line	4600	max. 4000		
	Line rate	100 Hz	max. 100 Hz		
	Line width range	min.	46 mm	176 mm / 104 mm / 51 mm / 40 mm / 20 mm	
		mid.	65 mm	220 mm / 130 mm / 63 mm / 51 mm / 25 mm	
		max.	85 mm	231 mm / 148 mm / 75 mm / 60 mm / 30 mm	
	Stand-off (mid-range)	150 mm ± 50 mm	180 mm ± 40 mm		
	Minimum point spacing (mid-range)	0.014 mm	0.013 mm		
	Laser power control	Fully automatic – per line	Fully automatic – per point		
	Accuracy	2 sigma / 30 µm	Probing Form error 1 sigma / 9 µm		
	Probing dispersion value* P[Form.Sph.D95%:Tr:ODS]	n.a.	36 µm		
	Weight	340 g	410 g		
	Controller	No	No		
	Laser safety	Class 2M	Class 2		
Working temperature	5°C – 40°C (41°F – 104°F)	10°C – 42°C (50°F – 108°F)			

*ISO 10360-8:2013

¹ The **Point Repeatability Test** is the reference test to determine measurement arm repeatability with ball probe. The cone is in front of the machine. Points are measured from multiple approach directions. The average point and the deviation of each point to the average centre are calculated. The result is the maximum range divided by two.

² The **Volumetric Accuracy Test** most accurately represents the reasonable expectations for machine performance in practical measuring applications since it involves measuring a certified length standard many times in several locations and orientations and compares the resultant measurements to the actual length. The Volumetric Length Accuracy Test is the most appropriate test for determining machine accuracy and repeatability. The result is the maximum deviation of the measuring distance less the theoretical length.

Ambient conditions

Working temperature: 0°C – 50°C (32°F – 122°F)
Storage temperature: -30° – 70° C (-22°F – 158°F)
Relative humidity: 10% – 90% non-condensing
Operational elevation: 0 – 2000 m (0 – 6600 ft)

Marks of conformity

CE Compliance: Yes

Power requirement


Universal worldwide voltage: 110V – 240V

³ **SI** designates the ROMER Absolute Arm with integrated scanner. **SE** designates the ROMER Absolute Arm with external scanner.

⁴ The **Scanning System Accuracy Test** most accurately represents the reasonable expectations for machine performance in practical measuring applications while using the laser scanning method. The test consists of measuring a matte grey sphere with 5 different arm articulations. In each articulation of the arm the sphere is scanned from 5 different directions such that the majority of the sphere is scanned. The result is the maximum 3D centre to centre distance of the 5 spheres.

All probing specifications are achieved with a ROMER Absolute Arm mounted on a ROMER base plate or magnetic base and using a 15 mm steel ball probe with a length of 50 mm under stable environmental conditions.







PRECISION MEASURING INSTRUMENTS



PORTABLE MEASURING ARMS




LASER TRACKERS & STATIONS




WHITE LIGHT SCANNERS




SENSORS




BRIDGE CMMS




MULTISENSOR & OPTICAL SYSTEMS




ULTRA HIGH ACCURACY CMMS




HORIZONTAL ARM CMMS



GANTRY CMMS



AUTOMATED APPLICATIONS



SOFTWARE SOLUTIONS



HEXAGON
METROLOGY

Hexagon Metrology offers a comprehensive range of products and services for all industrial metrology applications in sectors such as automotive, aerospace, energy and medical. We support our customers with actionable measurement information along the complete life cycle of a product – from development and design to production, assembly and final inspection.

With more than 20 production facilities and 70 Precision Centres for service and demonstrations, and a network of over 100 distribution partners on five continents, we empower our customers to fully control their manufacturing processes, enhancing the quality of products and increasing efficiency in manufacturing plants around the world.

For more information, visit www.hexagonmetrology.com

Hexagon is a leading global provider of information technologies that drive productivity and quality across industrial and geospatial applications. Hexagon's solutions integrate sensors, software, domain knowledge and customer workflows into intelligent information ecosystems that deliver actionable information. They are used in a broad range of vital industries.

Hexagon (Nasdaq Stockholm: HEXA B) has more than 15,000 employees in 46 countries and net sales of approximately 2.6bn EUR.

Learn more at www.hexagon.com

© 2015 Hexagon Metrology. Part of Hexagon

All rights reserved. Due to continuing product development, Hexagon Metrology reserves the right to change product specifications without prior notice.

Printed in Germany. April 2015